



TEMPLATE FOR TIME REMAINING COUNTDOWN CLOCK ART EXECUTIVE STYLE #2000 (UPDATED FACE)

--- Extend bleeds at least 3mm (.125") on all sides and inside LCD window ---

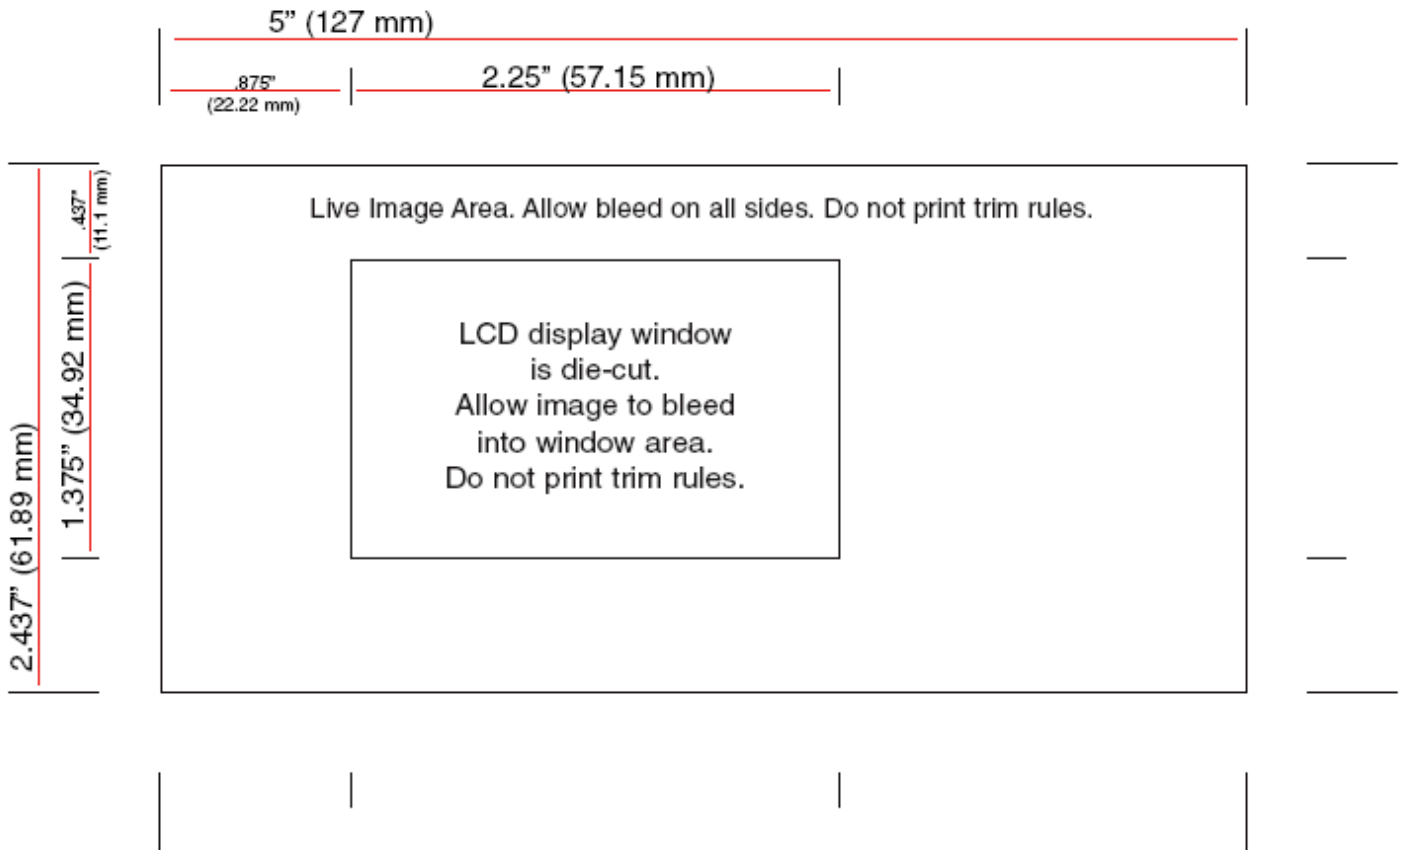


TEMPLATE FOR TIME REMAINING COUNTDOWN CLOCK ART PREMIERE STYLE #2001

Extend bleed at least 3mm (1/8") on all sides and inside LCD window

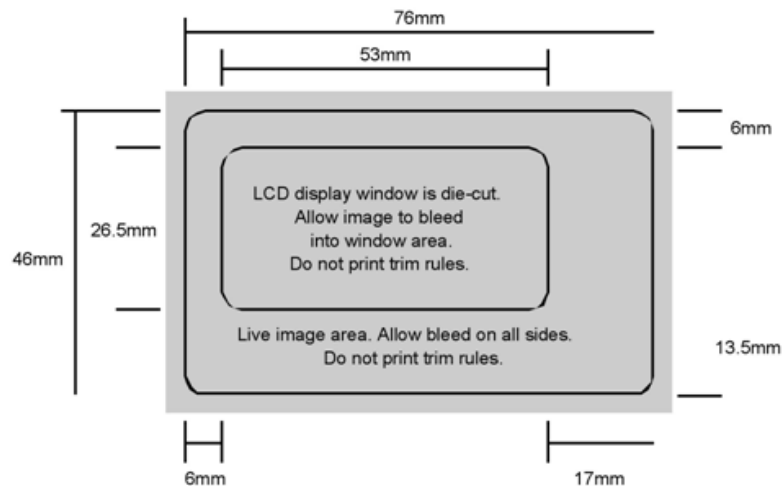

TEMPLATE FOR TIME REMAINING COUNTDOWN CLOCK ART CREDIT CARD STYLE #2002

Extend bleed at least 3mm (1/8") on all sides and inside LCD window

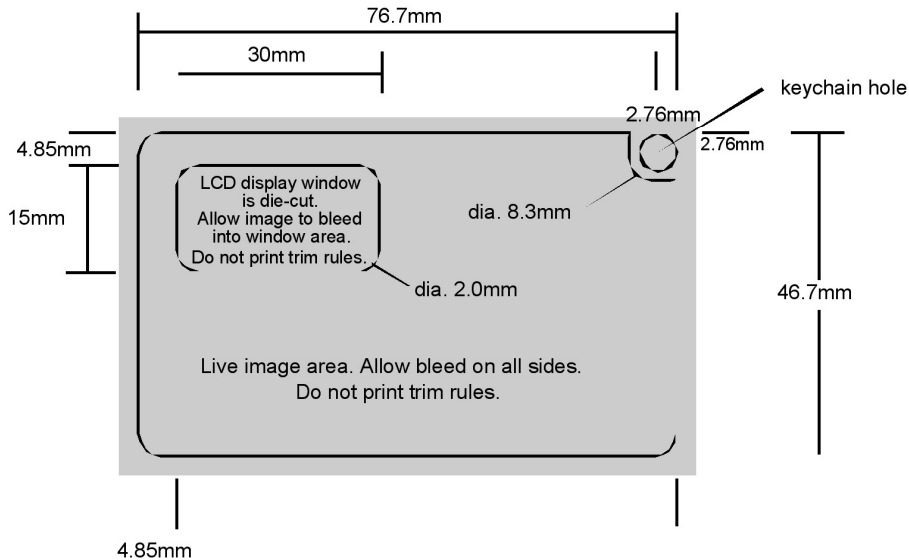

INSTRUCTIONS FOR PREPARING FILES

- Follow templates to create art to size.
- Add at least 3mm (1/8") of bleed on all sides, indicate trim with crop marks or on supplied hardcopy (do not include trim rules in final art).
- LCD display window is die-cut (do not include a printed window or trim rules in final art). Remember to extend bleed into window area. Also, if designing a frame or border for any edge, it must be at least 3mm (1/8") thick to allow for any variance in die-cutting.
- Include all image files used and all screen and printer fonts.
- Include a hard copy (preferably in color) of your document with order.
- Provide your document in the native application format. Approved programs are: QuarkXpress, Adobe Photoshop, Adobe Illustrator, Adobe Pagemaker, or Macromedia Freehand. PC users please call for specifications.
- All art should be supplied as CMYK composite (single file) EPS or TIFF file format at 288-300dpi.
- For solid black areas, we recommend a 40% cyan undercoat to enhance imaging.
- Allow 0.25 point trapping on all elements.
- When creating a vignette, use a tone value change between 0 and 50%. To achieve satisfactory results in blends, you are advised to introduce "noise". The effect can be achieved with a noise filter in Photoshop.
- Customers are responsible for supplying all materials required for the output of computer files, including but not limited to fonts and linked graphic files. We cannot be held responsible for files output incorrectly due to incomplete information, missing files, lack of marked up hard copy or deficiencies in various commercial software packages.
- Files may be submitted on: 100mb Zip disks; 1gb Jaz cartridges; Syquest 1.5 gb SyJet, 5.25"/44/88/200mb cartridges; M/Optical disks 5.25"/650mb/1.2/1.3gb; CD or floppy disk(s).